



Recommended P.C. Board Hole Layout

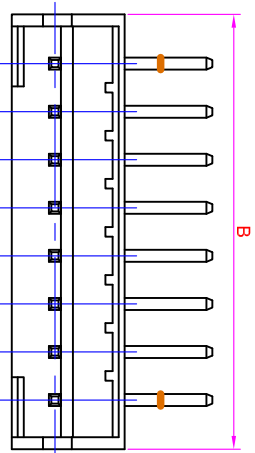

Specifications

Voltage Rating: 100V(AC)

Current Rating: 2A

Contact Resistance: 20mΩmax.

Dielectric Withstanding Voltage: 800V AC/1min.

Insulation Resistance: 1000MΩmin.

Material

Circuits: 2~16

Insulator: Nylon 66 UL 94V-0

Color: White or Natural

Contact: Brass 0.50mm(0.20)"Square Wire Pins

Plating: Tin or Gold Plated

Temperature Range: -25°C~+85° C

Applicable PC Board Thickness: 0.8 to 1.6mm

Order Information

WA2001J - R 0 XX- 00 TA




Serial No. _____

Terminal Type _____

R : Right Angle Type

No. of Contacts _____

Contact Plated _____

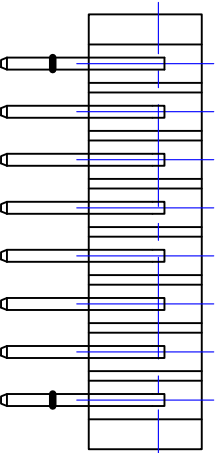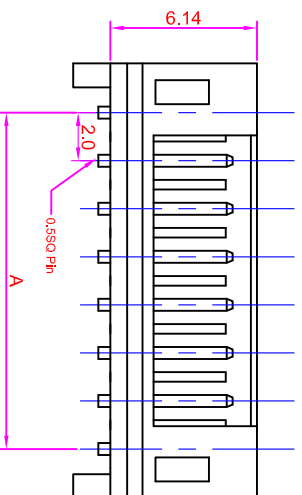

Poles	Dimension mm		Poles	Dimension mm	
	A	B		A	B
2	2.0	6.1	9	16.0	20.1
3	4.0	8.1	10	18.0	22.1
4	6.0	10.1	11	20.0	24.1
5	8.0	12.1	12	22.0	26.1
6	10.0	14.1	13	24.0	28.1
7	12.0	16.1	14	26.0	30.1
8	14.0	18.1	15	28.0	32.1

GENERAL TOLERANCE		單位 (UNIT)	料號 (PART NO.)	圖號 (DWG NO.)	名稱 (TITLE):
X. ± 0.50	X. ° ± 5°	mm	WA2001J-R0XX-00TA	WA2001J-R0XX	IO PARTS Enterprise Co., Ltd.
. X ± 0.20	. X ° ± 2°	Alice	核對 (CHECKED) Mary	製圖 (DRAWN) Fen-Fen	Wire To Board Pitch: 2.00mm Water / Right Angle Type
. X X ± 0.10	. X X ° ± 1°		日期 (DATE) 2007/08/07	比例 (SCALE) 1 / 1	
				布法 (PROJ.)	